FEATURES

- ▶ Industrial Standard SIP-7 Package
- ▶ Encapsulated 1W Converter
- ▶ Semi-regulated Output Voltage
- ▶ Very High Efficiency up to 88%
- ▶ I/O Isolation 3000VDC
- ▶ Wide Operating Ambient Temp. Range
- ▶ Short Circuit Protection
- ▶ UL/cUL 60950-1 Safety Approval



CSA 60950-1 CB Scheme

PRODUCT OVERVIEW

The MINMAX MA01H Series is an encapsulated 1W DC-DC converter in an industry-standard SIP-7 package, designed to deliver reliable isolated power for industrial and embedded systems. Featuring semi-regulated output voltage, high efficiency up to 88%, and reinforced 3000 VDC I/O isolation, it ensures excellent electrical separation and stable performance across a wide range of operating conditions. With short-circuit protection and a wide operating ambient temperature range, the MA01H Series provides dependable operation in demanding environments. Fully certified to UL/cUL 60950-1, it offers a safe, compact, and efficient solution for isolated bias supplies and signal interfaces.

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current	Input Current		Load Regulation	Reflected Ripple	Max. capacitive Load	Efficiency (typ.)
			Max.	@Max. Load	@No Load				@Max. Load
	VDC	VDC	mA	mA(typ.)	mA(typ.)	% (max.)	mA(typ.)	μF	%
MA01-05S05H	5 (4.5 ~ 5.5)	5	200	238	30	6.2	11	220	84
MA01-05S09H		9	110	229		5.5			86.5
MA01-05S12H		12	84	231		5.5			87
MA01-05S15H		15	67	230		5			87.5
MA01-12S05H	12 (10.8 ~ 13.2)	5	200	99	12	5	5	220	84
MA01-12S09H		9	110	96		3.3			86
MA01-12S12H		12	84	95		3.6			88
MA01-12S15H		15	67	95		2.9			88
MA01-24S05H	24 (21.6 ~ 26.4)	5	200	50	11	5	4.7	220	84
MA01-24S09H		9	110	48		3.5			86.5
MA01-24S12H		12	84	48		3.5			87.5
MA01-24S15H		15	67	48		3			87.5

*Please refer to the attached graph for the minimum load value.


Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	9	VDC
	12V Input Models	-0.7	---	18	
	24V Input Models	-0.7	---	30	
Input Voltage Range	5V Input Models	4.5	5	5.5	
	12V Input Models	10.8	12	13.2	
	24V Input Models	21.6	24	26.4	
Input Filter	All Models	Internal Capacitor			

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Line Regulation	For Vin Change of 1%	---	±1.05	±1.2	%
Load Regulation	Io=20% to 100%		See Model Selection Guide		
Ripple & Noise	0-20 MHz Bandwidth	---	30	60	mV P-P
Temperature Coefficient		---	±0.01	±0.02	%/℃
Short Circuit Protection	0.5 Second Max., Automatic Recovery				

Output Voltage Tolerance

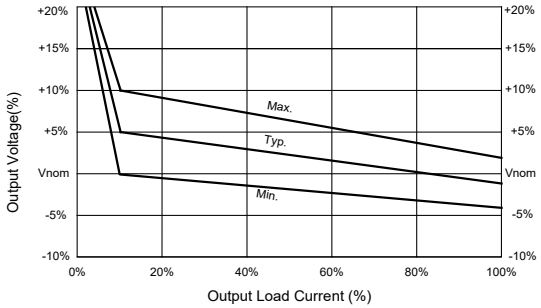


General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	3000	---	---	VDC
I/O Isolation Test Voltage	Flash tested for 1 Second	3300	---	---	V_{PK}
I/O Isolation Resistance	1000 VDC	10	---	---	GΩ
I/O Isolation Capacitance	100kHz, 1V	30	60	120	pF
Switching Frequency		50	100	120	kHz
MTBF (calculated)	MIL-HDBK-217F@25℃, Ground Benign	2,262,443	---	---	Hours
Safety Approvals	UL/cUL 60950-1 recognition(CSA certificate)				

Environmental Specifications

Parameter	Min.	Max.	Unit
Operating Ambient Temperature Range (For Power Derating see relative Derating Curve)	-40	+85	℃
Case Temperature	---	+105	℃
Storage Temperature Range	-50	+125	℃
Humidity (non condensing)	---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)	---	260	℃

Power Derating Curve

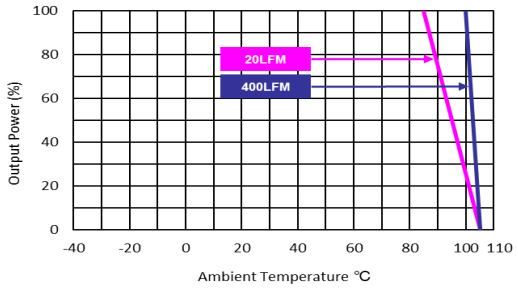


Notes

1 Specifications typical at Ta=+25℃, resistive load, nominal input voltage and rated output current unless otherwise noted.
2 Please do not operate the product without a minimum load condition.
3 We recommend to protect the converter by a slow blow fuse in the input supply line.
4 Other input and output voltage may be available, please contact MINMAX.
5 Specifications are subject to change without notice.
6 The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

Package Specifications

Mechanical Dimensions

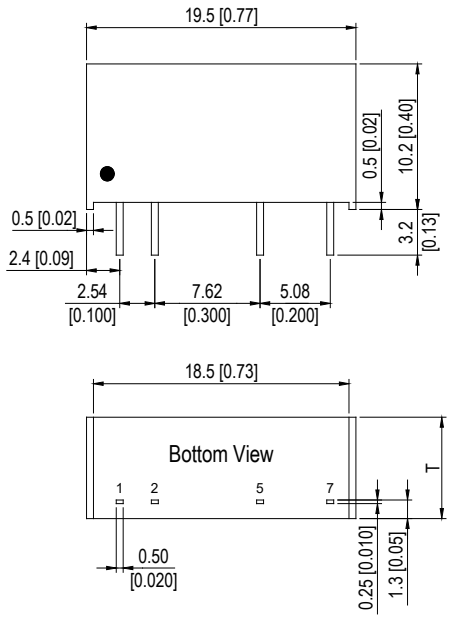

Pin Connections

Pin	Function
1	+Vin
2	-Vin
5	-Vout
7	+Vout

T=6.1(0.24) for 5V & 12V Input Models
T=7.1(0.28) for 24V Input Models

▶ All dimensions in mm (inches)
▶ Tolerance: X.X±0.25 (X.XX±0.01)
X.XX±0.13 (X.XXX±0.005)
▶ Pins ±0.05(±0.002)


Physical Characteristics

Case Size (5V & 12V Input)	:	19.5x6.1x10.2mm (0.77x0.24x0.40 inches)
Case Size (24V Input)	:	19.5x7.1x10.2mm (0.77x0.28x0.40 inches)
Case Material	:	Plastic resin (flammability to UL 94V-0 rated)
Pin Material	:	Alloy 42
Weight (5V & 12V Input)	:	2.2g
Weight (24V Input)	:	2.6g

Test Setup


Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with a inductor Lin (10μH) and Cin (1μF, ESR < 1.0Ω at 100 kHz) to simulate source impedance.
Capacitor Cin, offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 kHz.

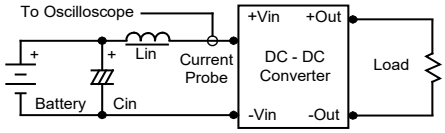

Peak-to-Peak Output Noise Measurement Test

Use a Cout 0.33μF ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

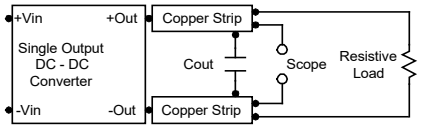


Technical Notes

Maximum Capacitive Load

The MA01H series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 220μF maximum capacitive load for devices. The maximum capacitance can be found in the data sheet.


Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.
In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.
Capacitor mounted close to the power module helps ensure stability of the unit, it is commended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 kHz) capacitor of a 2.2μF for the 5V input devices, a 1.0μF for the 12V input devices and a 0.47μF for the 24V devices.

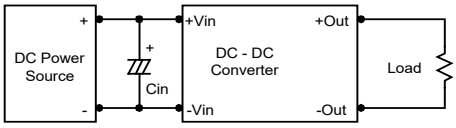

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 1.0μF capacitors at the output.

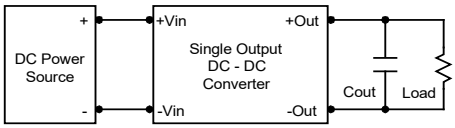

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.

